

Static Dissipative Anti-Fatigue No. 791

Performance: BEST


3 YEAR WARRANTY



Static Dissipative Anti-Fatigue mats are frequently used in commercial and manufacturing areas where controlling static and fatigue is essential. A metal scrim embedded in the vinyl surface ensures speedy and effective dissipation of static electricity, while the Nitricell® sponge base keeps employees comfortable and productive all day long. This mat must be grounded.

Specs

- Uses** Dry areas at risk from ESD static electricity
- Compound** Vinyl with a Nitricell® sponge base
- Resistivity** RTT - 5×10^7 to 8×10^8 ohm
RTG - 5×10^7 to 8×10^8 ohm
- Coefficient of Friction** .79 Dry per ASTM F1677
- Compression** .343 inches @ 35 psi per ASTM D575
- Tabor Abrasion** < 1% lost @ 1,000 cycles per Fed Std. 193
- Flammability** "A" Rating per MVSS 302
- Thickness** Approx. 1/2"
- Color** Gray (GY)



Stock Sizes

Part Number	Size
791.12x2x3GY	2' x 3'
791.12x3x5GY	3' x 5'


Non-Stock Sizes

Part Number	Size
791.12x3x75GY	3' x 75'
791.12x4x75GY	4' x 75'

Cut sizes up to 75' in length

791.12x3CutGY	3' Cut
791.12x4CutGY	4' Cut

Grounding snap is attached to lower left hand corner of each mat. See accessories on page 45.

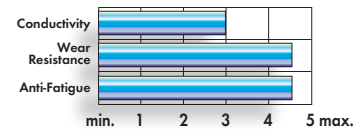

Electro-Soft No. 796


Performance: BETTER



Electro-Soft is a truly dissipative, sponge vinyl, anti-fatigue mat. Three times more resilient than ordinary vinyl sponge, it's available in single mats and full rolls, which can easily be cut to size. With all the features of much more expensive mats, Electro-Soft still meets every budget.

Specs

- Uses** Dry areas at risk for damage from static electricity
- Compound** Cross-linked Vinyl Sponge
- Resistivity** RTT - 1×10^9 to 9×10^9 ohm
RTG - 1×10^9 to 9×10^9 ohm
- Coefficient of Friction** .88 Dry per ASTM F1677
- Compression** .269 @ 35 psi per ASTM D575
- Tabor Abrasion** 3% lost @ 1,000 cycles per Fed Std.193
- Flammability** "A" Rating per MVSS 302
- Thickness** 3/8"
- Warranty** 1 year, conditional
- Color** Gray (GY)



Stock Sizes

Part Number	Size
796.38x2x3GY	2' x 3'
796.38x3x5GY	3' x 5'
796.38x3x60GY	3' x 60'
796.38x4x60GY	4' x 60'

Non-Stock Sizes

Part Number	Size
796.38x3CutGY	3' Cut
796.38x4CutGY	4' Cut

Cuts Sizes up to 60' in length

Grounding snap attached to lower left hand corner of each mat. See accessories on page 45.

